


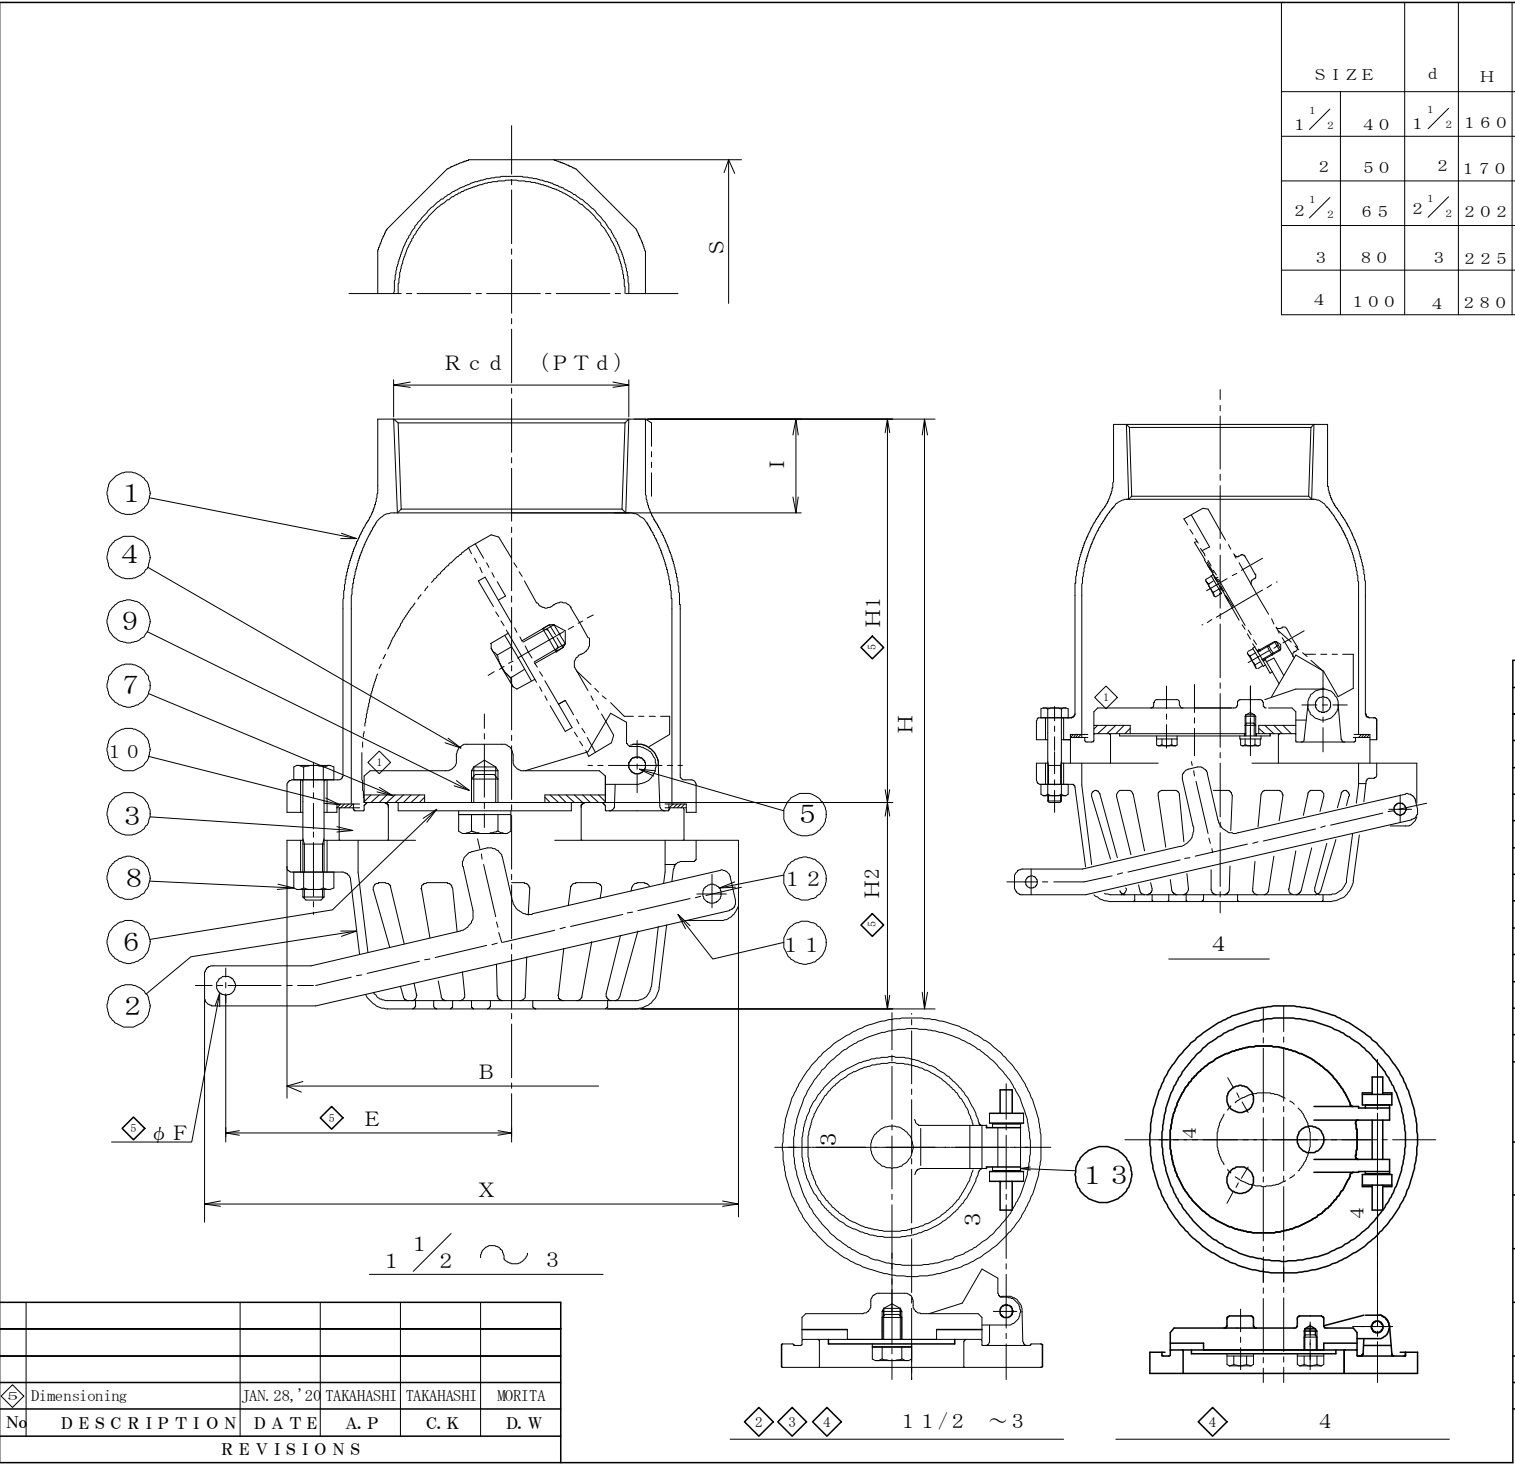

SIZE		d	H	I	S	B	X	$\diamond$ H1	$\diamond$ H2	$\diamond$ E	$\diamond$ F	WEIGHT Kg
1 1/2	40	1 1/2	160	22	60	140	160	96	64	85	7	2.5
2	50	2	170	26	72	140	160	106	64	85	7	2.5
2 1/2	65	2 1/2	202	30	88	158	175	131	71	99	7	3.5
3	80	3	225	35	100	168	200	148	77	107	7	4.5
4	100	4	280	40	135	232	240	182	98	110	7	11.0

13	WASHER	SUS304	2	$\diamond$ 2 $\diamond$ 3 $\diamond$ 4
12	BOLT NUT	SUS304	1	
11	LEVER	SCS13	1	
10	GASKET	V#7010	1	
9	BOLT WASHER	SUS304	SET	
8	BOLT NUT	SUS304	SET	
7	SEAT PACKING	FPM	1	
6	DISC PLATE	SUS304	1	
5	PIN	SUS303	1	
4	DISC	SCS13	1	
3	SEAT	SCS13	1	
2	STRAINER	SCS13	1	
1	BODY	SCS13	1	
No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS
NAME				
SCREWED FOOT VALVE				
FLUID		TEST PRESSURE	BODY	(HYD) 0.2 MPaG (AIR) MPaG
DESIGN PRESSURE	MPaG		SEAT	FILLING WATER TEST (HYD) MPaG (AIR) MPaG
DESIGN TEMPERATURE	100 °C			
DRAWING No			MODEL No SF-S-13	
DATE	A.P	C.K	D.S	D.W
SEP. 9. 2005	MORITA	MORITA	MORITA	MORITA
THREE-M INDUSTRY CO., LTD.				