
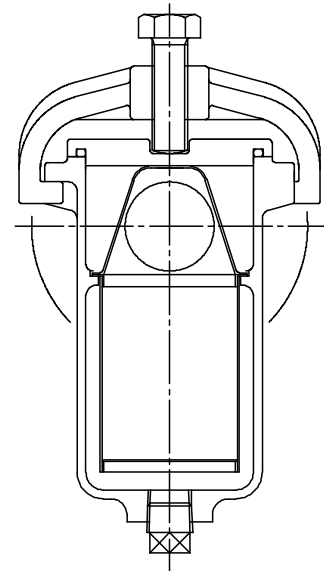

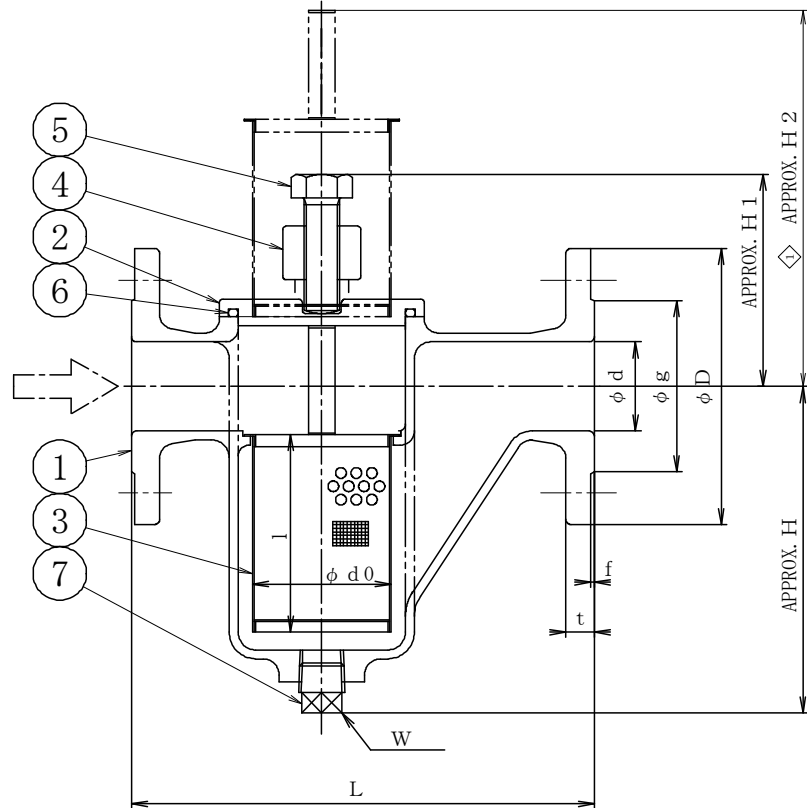


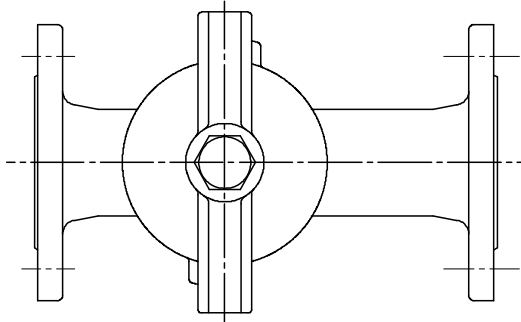

SIZE		d	L	FLANGED							d0	l	H	H1	1 H2	W	WEIGHT Kg	Q' TY
				D	C	g	f	t	N	h								
15	1/2	20	156	95	70	51	1	12	4	15	33	70	112	85	135	R3/8	3.5	
20	3/4	20	160	100	75	56	1	14	4	15	33	70	112	85	135	R3/8	3.5	
25	1	25	180	125	90	67	1	14	4	19	43	80	130	95	156	R1/2	5.5	
32	11/4	40	230	135	100	76	2	16	4	19	63	90	158	110	193	R3/4	8.5	
65	21/2	65	280	175	140	116	2	18	4	19	90	130	216	145	278	R1	16.0	
80	3	80	300	185	150	126	2	18	8	19	104	150	243	180	323	R1	21.0	
100	4	100	360	210	175	151	2	18	8	19	132	190	298	230	409	R1	34.0	

SCREEN

MESH
20 MESH
40 MESH
60 MESH
80 MESH
100 MESH

No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS
7	DRAIN PLUG	SUS304	1	
6	O-RING	FPM	1	
5	BOLT	SUS304	1	
4	SET YOKE	SCS13A	1	
3	SCREEN	SUS304	1	
2	COVER	SCS13A	1	
1	BODY	SCS13A	1	

NAME 10K
FLANGED U TYPE STRAINER

FLUID	DESIGN PRESSURE	DESIGN TEMPERATURE	TEST PRESSURE	BODY	SEAT
(HYD)	1.5 MPaG	130 °C	(HYD)	(HYD)	(HYD)
(AIR)	MPaG		(AIR)	(AIR)	(AIR)

DRAWING No			MODEL No 10FUL-1-13A	
DATE	A. P	C. K	D. S	D. W
OCT. 02. 2018	MORITA	MORITA	MORITA	HORIE



THREE-M INDUSTRY CO., LTD.

No	DESCRIPTION	DATE	A. P	C. K	D. W
1	Changed the specification	APR. 23, 2020	TAKAHASHI	TAKAHASHI	MORITA

REVISIONS