

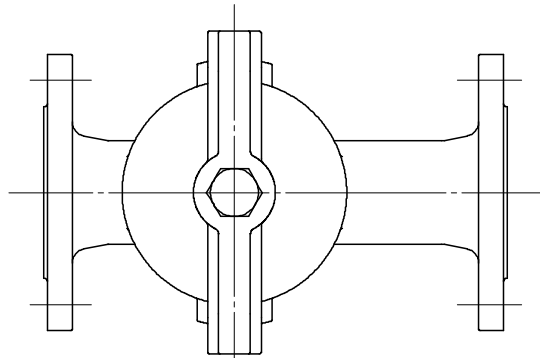


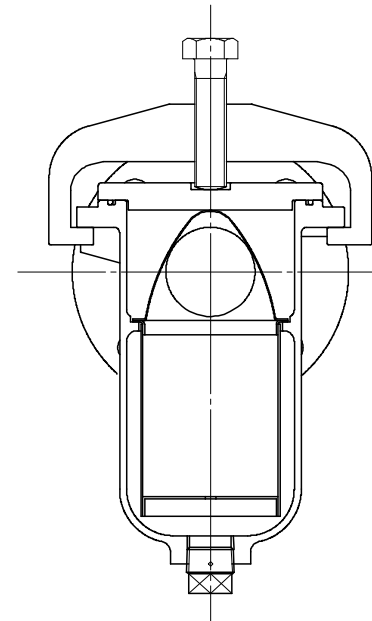

S I Z E			d	L	F L A N G E D						d0	l	H			W	W E I G H T	Q ' T Y
					D	C	g	f	t	N				h	K g			
4 0	1 1/2	4 0	230	140	105	81	2	16	4	19	63	90	158	115	194	R3/4	7. 1	
5 0	2	5 0	260	155	120	96	2	16	4	19	78	110	183	136	233	R3/4	10. 2	

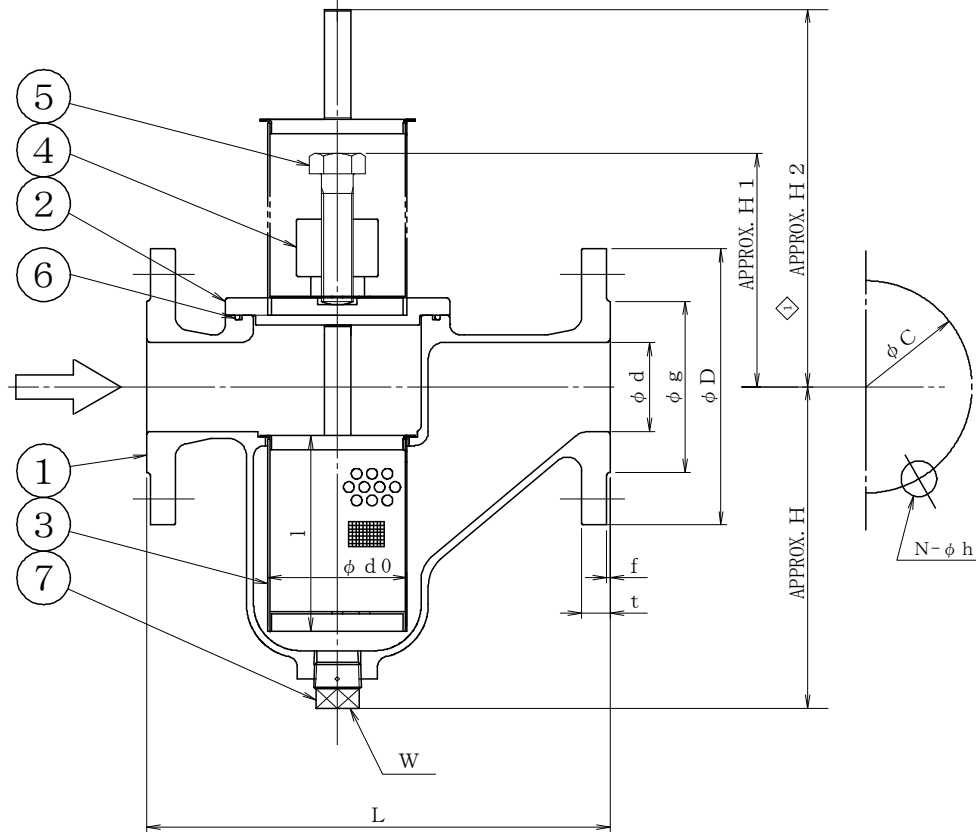

SCREEN

	MESH
	20 MESH
	40 MESH
	60 MESH
	80 MESH
	100 MESH

No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS
7	DRAIN PLUG	SUS304	1	
6	O-RING	FPM	1	
5	BOLT	SUS304	1	
4	SET YOKE	SCS13A	1	
3	SCREEN	SUS304	1	
2	COVER	SUS304	1	
1	BODY	SCS13A	1	

NAME 10K
FLANGED U TYPE STRAINER

FLUID	DESIGN PRESSURE	DESIGN TEMPERATURE	TEST PRESSURE	BODY	SEAT
	1.0 MPaG	130 °C		(HYD) 1.5 MPaG (AIR) MPaG	(HYD) MPaG (AIR) MPaG
				(HYD) MPaG (AIR) MPaG	(HYD) MPaG (AIR) MPaG

DRAWING No MODEL No 10FUL-1-13A

DATE	A. P	C. K	D. S	D. W
JUL. 21, 2017	MORITA	MORITA	HORIE	MORITA



THREE-M INDUSTRY CO., LTD.

2	Changed the specification	NOV. 01, 2021	TAKAHASHI	TAKAHASHI	MORITA
1	Changed the specification	APR. 23, 2020	TAKAHASHI	TAKAHASHI	MORITA
No	DESCRIPTION	DATE	A. P	C. K	D. W

REVISIONS