

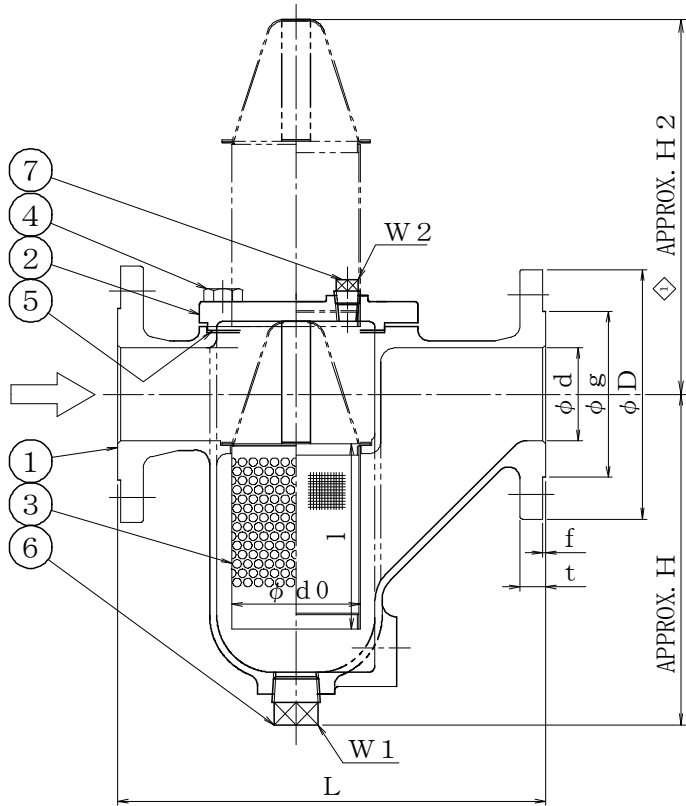


10FUL-13A

65A 80A, 100A

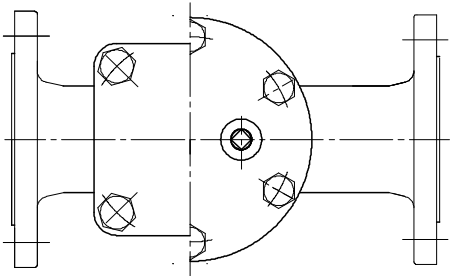

SIZE		d	L	FLANGED							d0	l	H	H2	W1	W2	Q'TY
				D	C	g	f	t	N	h							
65	2 1/2	65	300	175	140	116	2	18	4	19	90	130	235	278	R1	R3/8	
80	3	80	350	185	150	126	2	18	8	19	104	150	265	323	R1	R3/8	
100	4	100	400	210	175	151	2	18	8	19	132	190	330	409	R1	R3/8	

SCREEN

	MESH
	20 MESH
	40 MESH
	60 MESH
	80 MESH
	100 MESH

7	VENT PLUG	SUS304	1	
6	DRAIN PLUG	SUS304	1	
5	GASKET	T#9007-G20	1	
4	BOLT	SUS304	SET	
3	SCREEN	SUS304	1	
2	COVER	SCS13A	1	
1	BODY	SCS13A	1	

No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS
NAME 10K				
FLANGED U TYPE STRAINER				
FLUID		TEST PRESSURE	BODY	(HYD) 1.5 MPaG (AIR) MPaG
DESIGN PRESSURE	1.0 MPaG		SEAT	(HYD) MPaG (AIR) MPaG
DESIGN TEMPERATURE	150 °C			(HYD) MPaG (AIR) MPaG
DRAWING No		MODEL No 10FUL-13A		
DATE	A. P	C. K	D. S	D. W
2013. 8. 30	MORITA	MORITA	MORITA	HISAKA

◇	Changed the specification	APR. 23, 2020	TAKAHASHI	TAKAHASHI	MORITA
No	DESCRIPTION	DATE	A. P	C. K	D. W
REVISIONS					