

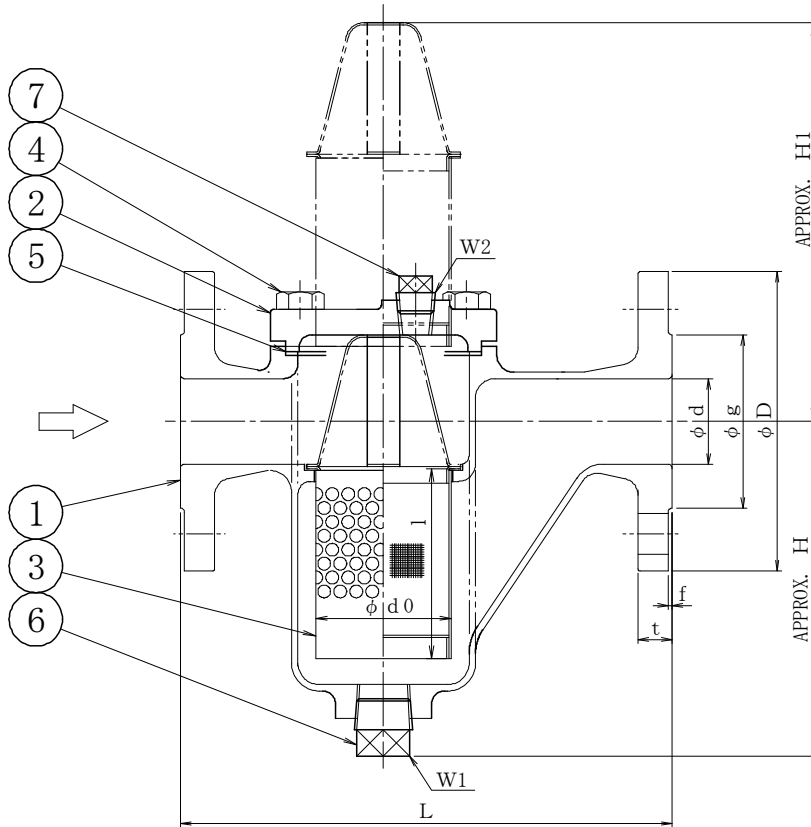



# 10FUL-14A

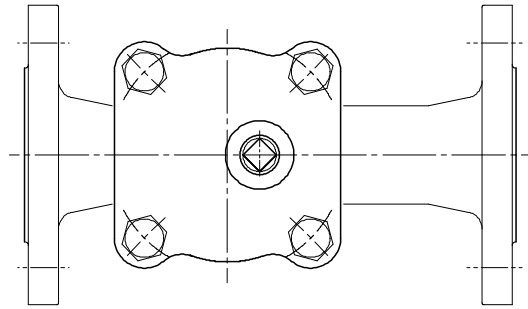

| S I Z E |      | d  | L    | F L A N G E D |     |     |   |    |   |    | d0 | l   | H   | H1  | W1   | W2   | Q' T Y |
|---------|------|----|------|---------------|-----|-----|---|----|---|----|----|-----|-----|-----|------|------|--------|
|         |      |    |      | D             | C   | g   | f | t  | N | h  |    |     |     |     |      |      |        |
| 1 5     | 1/2  | 20 | 15 6 | 95            | 70  | 5 1 | 1 | 12 | 4 | 15 | 33 | 70  | 112 | 135 | R3/8 | R3/8 |        |
| 20      | 3/4  | 20 | 160  | 100           | 75  | 56  | 1 | 14 | 4 | 15 | 33 | 70  | 112 | 135 | R3/8 | R3/8 |        |
| 25      | 1    | 25 | 180  | 125           | 90  | 67  | 1 | 14 | 4 | 19 | 43 | 80  | 130 | 156 | R1/2 | R3/8 |        |
| 32      | 11/4 | 40 | 230  | 135           | 100 | 76  | 2 | 16 | 4 | 19 | 63 | 90  | 158 | 194 | R3/4 | R3/8 |        |
| 40      | 11/2 | 40 | 230  | 140           | 105 | 81  | 2 | 16 | 4 | 19 | 63 | 90  | 158 | 194 | R3/4 | R3/8 |        |
| 50      | 2    | 50 | 260  | 155           | 120 | 96  | 2 | 16 | 4 | 19 | 78 | 110 | 183 | 233 | R3/4 | R3/8 |        |



MARKING  
EXAMPLE



## SCREEN

| SCREEN | MESH     |
|--------|----------|
|        | 20 MESH  |
|        | 40 MESH  |
|        | 60 MESH  |
|        | 80 MESH  |
|        | 100 MESH |

|   |            |            |   |  |
|---|------------|------------|---|--|
| 7 | VENT PLUG  | SUS316     | 1 |  |
| 6 | DRAIN PLUG | SUS316     | 1 |  |
| 5 | GASKET     | T#9007-G20 | 1 |  |
| 4 | BOLT       | SUS304     | 4 |  |
| 3 | SCREEN     | SUS316     | 1 |  |
| 2 | COVER      | SCS14A     | 1 |  |
| 1 | BODY       | SCS14A     | 1 |  |

| No | NAME OF PART | MATERIAL | Q.TY | REMARKS |
|----|--------------|----------|------|---------|
|----|--------------|----------|------|---------|

NAME 10K

## FLANGED U TYPE STRAINER

|                    |          |               |      |                |
|--------------------|----------|---------------|------|----------------|
| FLUID              |          | TEST PRESSURE | BODY | (HYD) 1.5 MPaG |
|                    |          |               |      | (AIR) — MPaG   |
| DESIGN PRESSURE    | 1.0 MPaG |               | SEAT | (HYD) — MPaG   |
|                    |          |               |      | (AIR) — MPaG   |
| DESIGN TEMPERATURE | 150 °C   |               |      | (HYD) — MPaG   |
|                    |          |               |      | (AIR) — MPaG   |

DRAWING No MODEL No 10FUL-14A

|               |           |           |        |       |
|---------------|-----------|-----------|--------|-------|
| DATE          | A. P      | C. K      | D. S   | D. W  |
| FEB. 24, 2022 | TAKAHASHI | TAKAHASHI | MORITA | HORIE |



THREE-M INDUSTRY CO., LTD.

| No        | DESCRIPTION | DATE | A. P | C. K | D. W |
|-----------|-------------|------|------|------|------|
| REVISIONS |             |      |      |      |      |