


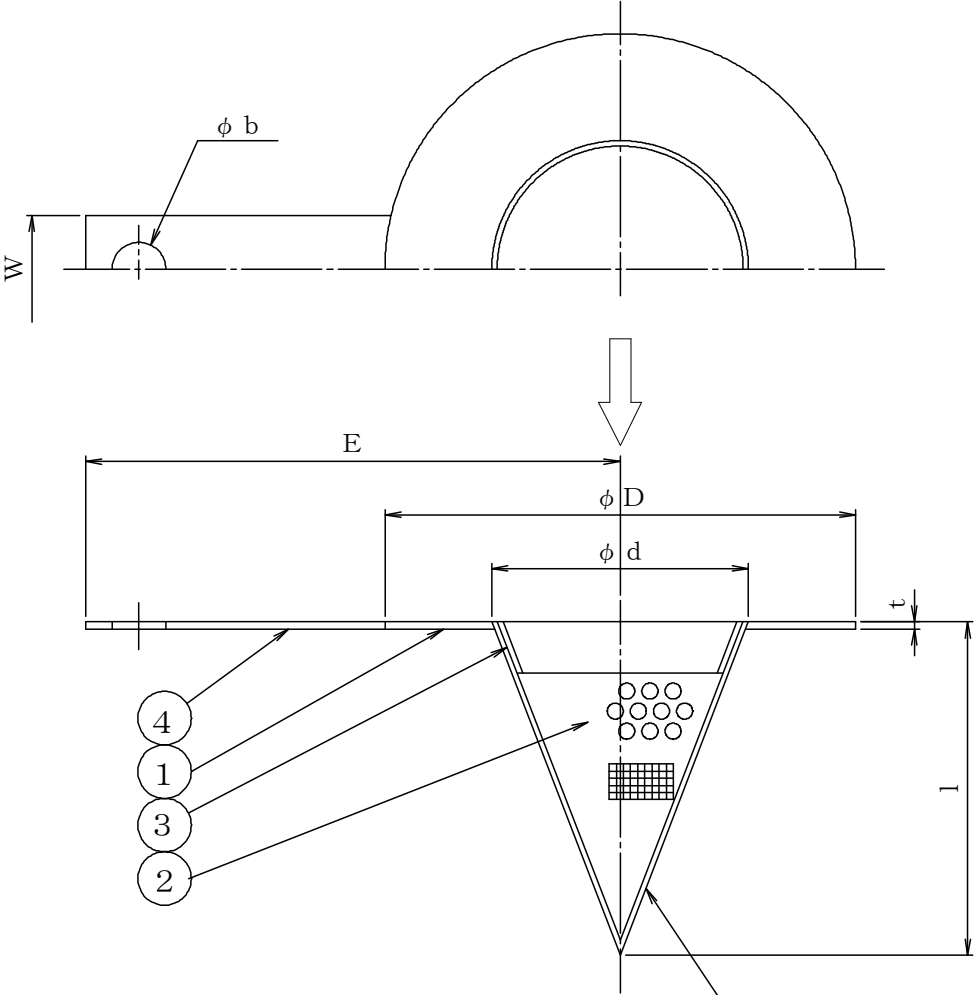

OUTSIDE : PUNCHING PLATE
INSIDE : WIRE CLOTH

SIZE		d	t	D	l	E	W	b		WEIGHT Kg
15	1/2	13	2	55	22	85	20	6		0.06
20	3/4	18	2	60	26	85	20	6		0.07
25	1	24	2	72	30	90	20	6		0.09
32	1 1/4	30	2	82	35	95	20	6		0.11
40	1 1/2	36	2	87	42	100	20	6		0.12
50	2	48	2	102	52	120	20	6		0.15
65	2 1/2	60	2	122	62	140	20	6		0.21
80	3	72	2	132	74	150	20	6		0.23
100	4	95	2	157	95	160	20	6		0.30
125	5	118	3	188	115	180	25	6		0.59
150	6	142	3	218	140	200	25	6		0.75
200	8	188	3	268	175	230	25	6		1.10
250	10	235	3	330	220	260	25	6		1.62
300	12	280	3	375	260	300	25	6		1.98
350	14	325	6	420	300	330	35	10		4.04
400	16	375	6	483	340	360	35	10		5.22
450	18	425	6	538	385	390	40	10		6.65
500	20	470	6	593	425	420	40	10		7.97
600	24	570	6	697	510	480	40	10		11.71

SCREEN

	MESH
	20 MESH
	40 MESH
	60 MESH
	80 MESH
	100 MESH

4	HANDLE	SUS304	1	
3	LINER	SUS304	1	
2	SCREEN	SUS304	1	
1	BODY	SUS304	1	
No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS
NAME 10K CONE TYPE TEMPORARY STRAINER				
FLUID		TEST PRESSURE	BODY	(HYD) MPaG (AIR) MPaG
DESIGN PRESSURE	MPaG		SEAT	(HYD) MPaG (AIR) MPaG
DESIGN TEMPERATURE	°C			(HYD) MPaG (AIR) MPaG
DRAWING No		MODEL No 10T-2-04		
DATE	A. P	C. K	D. S	D. W
SEP. 13, 2006	MORITA	MORITA	MORITA	HISAKA



THREE-M INDUSTRY CO., LTD.

◆	Deleted size 10A	NOV. 16, '06	MORITA	MORITA	HISAKA
No	DESCRIPTION	DATE	A. P	C. K	D. W
REVISIONS					