


1 5 0 T - 2 - 0 4

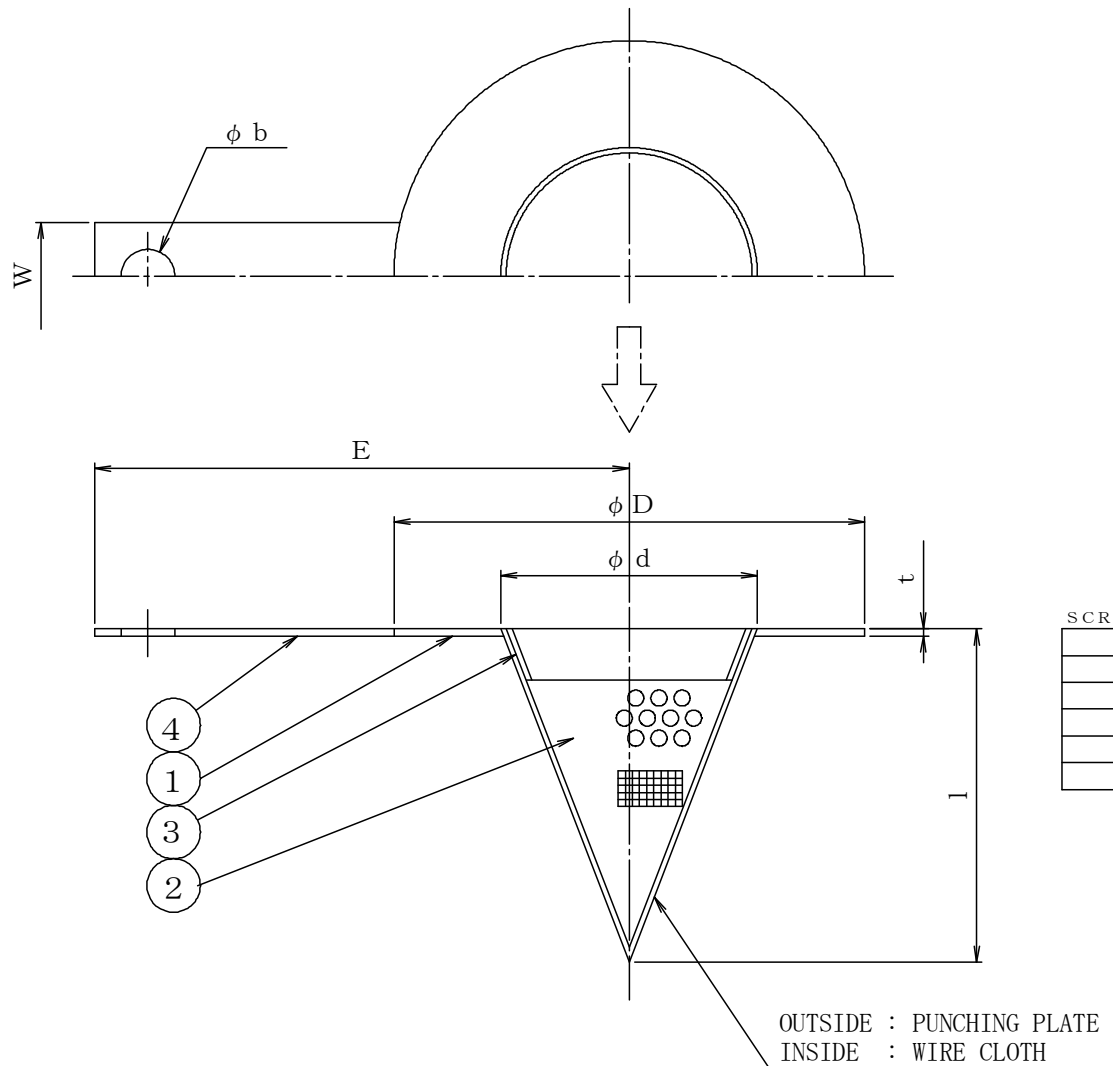

SIZE		d	t	D	l	E	W	b	WEIGHT Kg
1/2	15	13	2	47	22	85	20	6	0.05
3/4	20	18	2	56	26	85	20	6	0.06
1	25	24	2	66	30	90	20	6	0.08
1 1/4	32	30	2	75	35	95	20	6	0.09
1 1/2	40	36	2	85	42	100	20	6	0.11
2	50	48	2	104	52	120	20	6	0.16
2 1/2	65	60	2	123	62	140	20	6	0.21
3	80	72	2	135	74	150	20	6	0.24
4	100	95	2	173	95	160	20	6	0.37
5	125	118	3	196	115	180	25	6	0.65
6	150	142	3	221	140	200	25	6	0.78
8	200	188	3	277	175	230	25	6	1.21
10	250	235	3	338	220	260	25	6	1.73
12	300	280	3	408	260	300	25	6	2.53
14	350	325	6	448	300	350	35	10	5.57
16	400	375	6	512	340	380	35	10	7.1

SCREEN

SCREEN	MESH
20	MESH
40	MESH
60	MESH
80	MESH
100	MESH

4	HANDLE	SUS304	1	
3	LINER	SUS304	1	
2	SCREEN	SUS304	1	
1	BODY	SUS304	1	
No	NAME OF PART	MATERIAL	QTY	REMARKS
NAME CLASS 150 CONE TYPE TEMPORARY STRAINER				
FLUID		TEST PRESSURE	BODY	(HYD) MPaG (AIR) MPaG
DESIGN PRESSURE	MPaG		SEAT	(HYD) MPaG (AIR) MPaG
DESIGN TEMPERATURE	°C			(HYD) MPaG (AIR) MPaG
DRAWING No		MODEL No 150T-2-04		
DATE	A. P	C. K	D. S	D. W
NOV. 16, 2006	MORITA	MORITA	MORITA	HISAKA



THREE-M INDUSTRY CO., LTD.